



CVA Series

Networked Power Amplifiers

The CVA50-1 NET and NET+ are subcompact 50W mono 70V/100V networkable power amplifiers built to meet the rigorous demands of high quality commercial, industrial and Pro Audio sound installations. The CVA50-1 NET version is designed with a Dante™ only signal input, while the NET+ version has both Dante™ and local legacy inputs. A priority switch on the rear allows for selective ducking of either signal to allow one amplifier to do the work of two. These versatile dual input amplifiers allow for legacy audio devices to be used in a local setting while still having the flexibility of utilizing a networked signal. By setting the priority to local, the network could play background music until a signal is detected on the local inputs from a TV in a lobby. If the priority is set to network, a page could duck the TV output in a training room. These lightweight Class D amplifiers straddle the digital divide using all the benefits of the networked audio and while allowing for legacy device use.

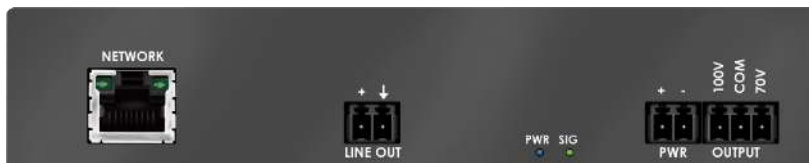

CVA50-1 NET

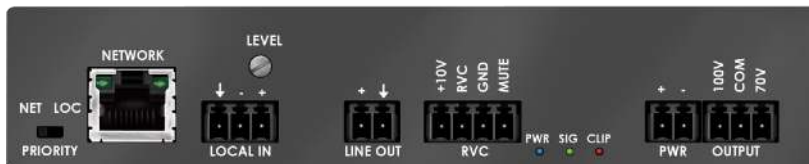

CVA50-1 NET+

CVA50-1 NET

CVA50-1 NET+

50W x 1 100V/70V

Features:

- Sub Compact 1/3 rack package
- Mono Dante™ Channel
- Mono constant voltage amplifier (100V or 70.7V)
- Selectable priority switching (NET+ only)
- Remote volume control (NET+, local input or only)
- Multiple mounting options
- External inline power supply
- Made in the USA

Applications:

- Schools & Classrooms
- Hospitality
- Restaurants
- Retail Stores
- Existing Dante™ networks requiring additional endpoints

STEWART AUDIO
The Difference is Hear

14335 Cuesta Court Ste C • Sonora Ca 95370 • TEL: 209.588.8111 • www.stewartaudio.com

CVA50-1 NET/NET+

50W x 1 100V/70V

Specifications

CVA50-1 100V/70V	50 W
Frequency Response (+0, -3 dB)	100 Hz—20 kHz
Power Bandwidth (+3, -3 dB)	80 Hz—30 kHz
THD+N	<.1% @ Full Power
Signal-to-Noise Ratio	>80dB
Remote Volume Control	0-10V DC, 4 Pin Euro Block (Local input only)
Input Sensitivity	.5V (-3 dBV)
Standard Voltage Gain	151X (43dB) @ 70.7 Volts out
Input impedance (Balanced/Unbalanced)	20k Ohms/10k Ohms
Sleep, Idle Current Draw , 1/8 power draw	3.3 / 6.9 / 14.2 Watts
Class	D
Input Connectors	RJ45, Euro Block 3 Pin, 3.5mm (NET+)
Network Inputs	Dante
Output Connectors	Euro Block 2 Pin, 5mm
Power Supply	External in-line 48VDC (Included), 2 pin Euro Block
Cooling	Convection—Cooling (No Fans)
Controls	Level (NET+ Local input only)
LED Indicators	Power, Signal Present & Clip
Construction	Aluminum Chassis & Top Cover
Dimensions (height, width, depth)	1.25”H x 6.00”W x 4.00”D (3.2H x 15.2W x 10.2D cm)
Weight	<1.2 lbs (0.54 kg)
Warranty	3 years
Plenum Rating	UL 2043 Approved