


-Cut off one end of the RCA cable for termination to the captive screws on the VoiceBox. All terminations will be mono.

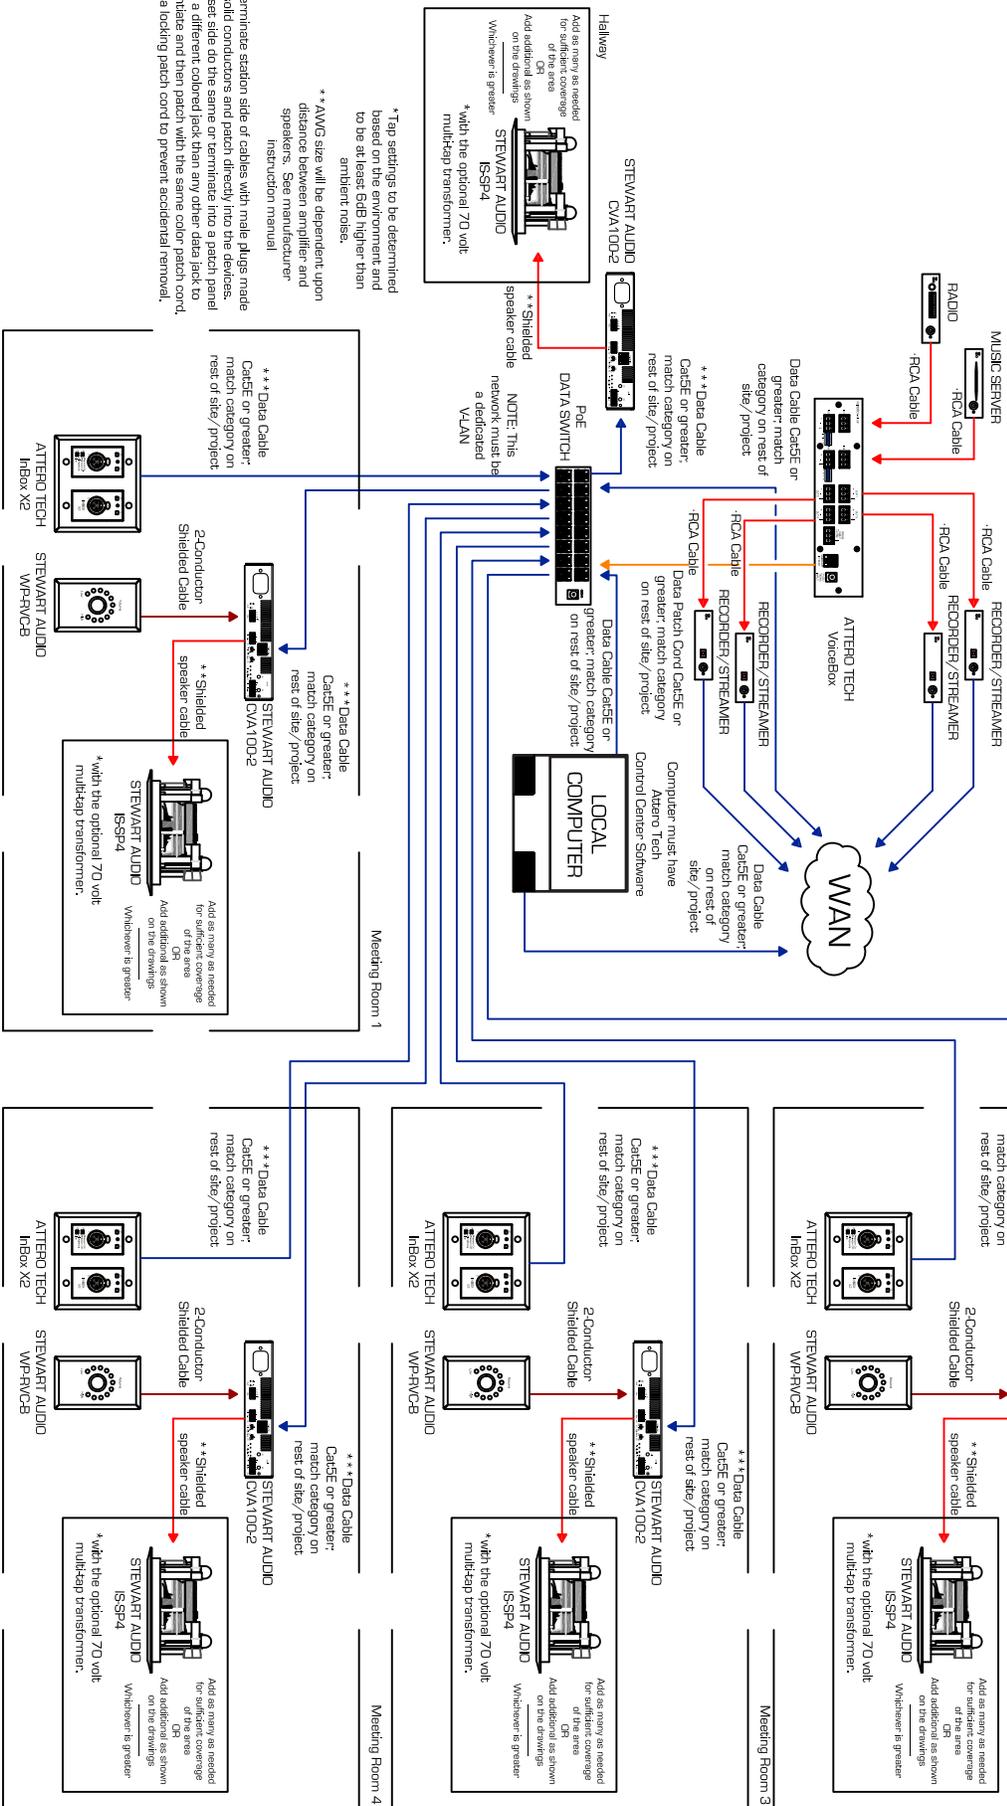

\*Tap settings to be determined based on the environment and to be at least 6dB higher than ambient noise.  
 \*\*AMG size will be dependent upon distance between amplifier and speakers. See manufacturer instruction manual

\*\*\*Terminate station side of cables with male plugs made for solid conductors and patch directly into the devices. At closest side do the same or terminate into a patch panel with a different colored jack than any other data jack to differentiate and then patch with the same color patch cord. Use a locking patch cord to prevent accidental removal.

\*\*\* Data Cable Cat5E or greater match category on rest of site/project

\*\*\* Data Cable Cat5E or greater match category on rest of site/project

\*\*\* Data Cable Cat5E or greater match category on rest of site/project

\*\*\* Data Cable Cat5E or greater match category on rest of site/project

\*\*\* Data Cable Cat5E or greater match category on rest of site/project

\*\*\* Data Cable Cat5E or greater match category on rest of site/project

\*\*\* Data Cable Cat5E or greater match category on rest of site/project

\*\*\* Data Cable Cat5E or greater match category on rest of site/project

\*\*\* Data Cable Cat5E or greater match category on rest of site/project

# MEETING FACILITY WITH OVERHEAD AUDIO AND INDIVIDUAL ROOM RECORDING/STREAMING

**STEWART AUDIO**

**ATERRO TECH**

SCALE: None

DATE:

APPROVED BY:

The drawing is the sole property of Stewart Audio. Any unauthorized distribution of the drawing is prohibited.